

Precision Pan-Tilt Unit

Miniature Pan-Tilt Units

Miniature Computer Controlled Pan-Tilt Unit

The PTU-D46 family of pan-tilt units provide fast, precise positioning in an extremely small and lightweight package. They are fully computer-controlled and offer programmability of speed, acceleration, power, and other parameters. The included controller handles precise kinematic motion control according to user set parameters.

Real-time Control with Rich Command Set

The controller includes built-in RS-232 and RS-485 interfaces and the units can be networked. They accept ASCII and binary command formats. Commands can be sent at up to 60 Hz (commands/second) for demanding applications such as laser scanning and video tracking.

Features Include:

- Fast - speeds to 300°/second
- Resolutions to 0.003°
- Load capacity over 9 lbs (4 kg)
- Precise control of position, speed & acceleration
- On-the-fly position and speed changes
- Small form factor (< 5.2" tall)
- Light weight (head < 3 lbs)
- Single DC power input suited for battery operation
- Low cost



Applications

- Robotic & Computer vision
- Security & surveillance
- Industrial automation
- Tracking
- Webcams
- Laser ranging
- Teleconferencing/distance learning
- Antenna pedestal
- Photography, video & special effects



General Features

- Simple to use from any RS-232 terminal or computer
- Rigid worm gear design. No belts/pulleys.
- Fast and accurate camera positioning at low cost
- Precise control of position, speed & acceleration
- Extremely small form factor
- Allows on-the-fly position and speed changes
- ASCII command mode for simplicity, binary commands available for high-performance

Options

- International AC/DC Power Supply
- Weatherized option provides outdoor use
- Nodal (gimbal) - payload aligned to motion axes
- C Programmer's Interface
- PTU network cabling kits
- Trackball and analog joystick interfaces
- Geo-Pointing Module (aim using GPS coordinates)

Pan-Tilt Performance

	PTU-D46-17	PTU-D46-70	PTU-D46-17P70T
Rated Payload	6 lbs (2.72 kg)	9 lbs (4.08 kg)	9 lbs (4.08 kg)
Max Unloaded Speed (@ 30 VDC)	300°/second	60°/second	300°/second (Pan) 60°/second (Tilt)
Resolution	0.013°	0.003°	Pan: 0.013° Tilt: 0.003°

Pan-Tilt Features

Tilt Range	-47° to +31° from level (78° range) with extended range enabled for 80° down (111° range)
Pan Range	+/- 159° (+/- 180° with extended range mode enabled)
Pan Speed Min	<min. resolution> /second
Tilt Speed Min	<min. resolution> /second
Duty Cycle	High duty cycle, or 3-5 million cycles
Acceleration/Deceleration	Trapezoidal. On-the-fly speed and position changes.

Mechanical

Pan Tilt Unit Weight	3 lbs
Dimensions	3" wide x 5.13" high x 4.25" deep
Payload Mounting	Hole for 1/4-20 screw standard. Camera mounting plate removes for easy customizing.
Pan-Tilt Unit Mounting	Bottom or front 1/4-20 mounting
Controller Weight	8 oz.
Dimensions	3.25" wide x 4.5" long x 1.25" high

Connections & Communications

Host Interface	RS-232 (DB-9 female connector) RS-422/485 (RJ-12 connector)
Networking	Control of multiple pan-tilt units from one or more host computers. Multidrop RS-485 network using RJ-12.
Control Protocols	DP (ASCII, Binary)


Power Requirements

Input Voltage	12-30VDC unregulated (fastest performance & torque @ 30VDC)
Power Consumption (Measured at 30VDC)	13W continuous peak (full-power mode) 6W continuous peak (low-power mode) 1W continuous peak (holding power off mode)

Packaging & Environmental

Standards	Designed to IP65 (head only, with weatherized)
Operating Temperature	-20°C to 60°C
Non-Operating Temperature	-20°C to 60°C
Humidity	100% relative humidity, non-condensing
Dust/Sand (Operating)	Sustain exposure to blowing dust/sand
Wind/Rain/Fog	IP65
Color/Finish	Black anodized
EMI	CE Mark, FCC Part 15, part B Class B
Certifications	RoHS Compliant

Specifications subject to change without notice.

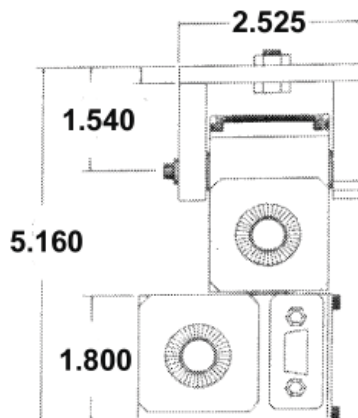

Directed Perception

Advanced and Innovative products for the control and positioning of sensors and precision instruments

890C Cowan Road Burlingame, California 94010

Office 650-692-3900 | Fax 650-692-3930

sales@DPerception.com | www.DPerception.com